

## Slotted Bracket




ISO 9001:2015  
No.: 92200062



ISO 14001:2015  
No.: 142200063



ISO 45001:2018  
No.: 452200064

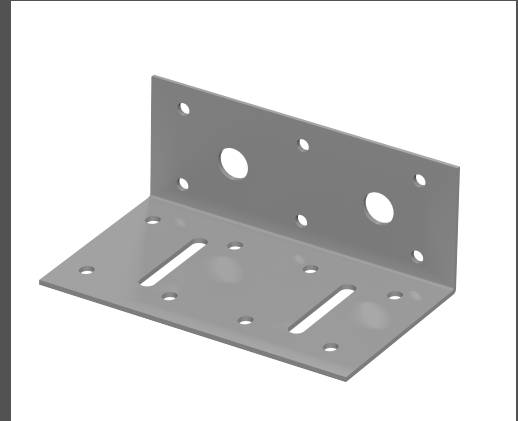

### DESCRIPTION

The slotted L-Bracket is used to reinforce the connection between the vertical studs and the top track, especially when the system is subjected to high risk of deflection. It can be used in lining, internal partitioning and external cladding applications.

### STANDARD

Gaccessories™ are manufactured in accordance with ASTM C645 and ASTM A653.

### TECHNICAL SPECIFICATIONS

| SPECIFICATION    | VALUE       |
|------------------|-------------|
| Material         | Steel       |
| Coating          | Zinc Plated |
| Width            | 50 mm       |
| Heights          | 75 mm       |
| Length           | 80 - 125 mm |
| Weights          | 63 - 339 g  |
| Thickness        | 0.8 - 3 mm  |
| Yield Strength   | 250 Mpa     |
| Tensile Strength | 310 Mpa     |